



Tilt n Turn

Energy Efficient
Tilt to ventilate
or Turn to
fully open

European style Tilt n Turn Windows allow you to ventilate your room by turning the handle to tilt the window inwards from the top

Tilt n Turn Windows fully open inwards like a door with full height windows occasionally used to allow access to smaller courtyards

Select from our latest range of architectural colours

Thermotek Double Glazing

+


Insulated multi-chambered frame

+

High efficiency air tight dual seals

=

U 1.0 - 2.3 Highest rated protection against outside heat, cold and noise

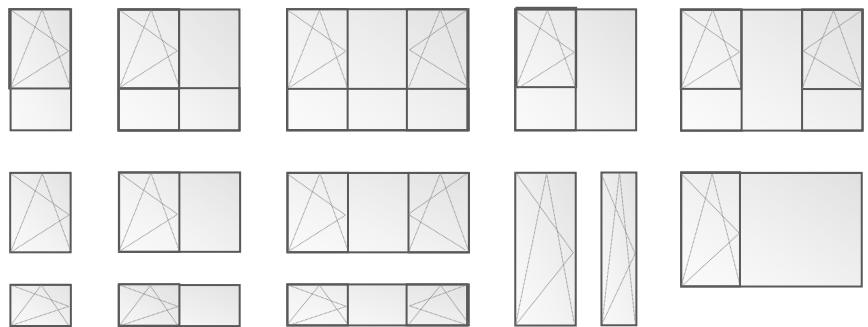

* Window configurations can be customised to suit your home

Heating and Cooling Savings up to 50% plus up to 90% outside noise reduction Industry best service, value and advice

info@thermotekwindows.com.au 1300 663 861



Superior protection against outside heat, cold and noise

High Efficiency

THERMOTEK


Double Glazing

6.38mm Laminated Security Glass*

Insulating ARGON Gas Fill 4mm

Low E Safety Solar Glass*


*Upgrade Option



Outside Glass - UPGRADE OPTION 6.38 mm Laminated Security Glass

Similar to glass used in car windshields, laminated glass is hard to break offering high security against accidental injury, attempted break-ins and severe weather conditions

Laminated glass offers protection against UV rays which can fade furnishings and carpets and can help Stop Outside Noise by up to 90% when applied to double glazing



Gap Insulating ARGON Gas Fill

Argon Gas is a clear, dense, inert gas that is injected into your Double Glazing unit to increase insulation efficiency by up to 30% when used instead of common de-hydrated air

Glass Options



Standard CLEAR

Inside Glass - UPGRADE OPTION 4 mm Toughened Low E Solar Glass


Toughened Safety Glass, is four to five times stronger than standard glass and crumbles into small fragments or pebbles, rather than splintering into dangerous shards if struck by an extremely hard impact




Opaque



The addition of a Solar Control Low E coating reflects out strong radiant heat from the sun in summer while reflecting infrared heat back into your home in winter to substantially reduce heating and cooling costs all year round by up to 50%



Cathedral

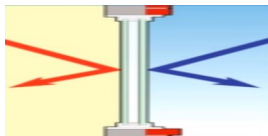

Industry Best U 1.0 - 2.3 Rating

Insulated Multi-Chamber Frame

Energy Efficient Fusion welded frames containing multiple sealed air chambers provide superior insulation

Energy Efficient Dual Seals

TPE (Thermoplastic Elastomer) seals are incorporated into the Multi-Chamber frame to further enhance thermal and acoustic performance

Safe & Secure Multi-Point locking

Long Lasting Easy Winding mechanism

Flyscreens are Included

Industry Best Product Warranty

10yrs

Extended warranty from an industry average of 7 years to an impressive 10 years



Industry Best U 1.0 - 2.3

1300 663 861

AUSTRALIAN MADE

Australian Standards AS1288 - AS2047 - AS4420

thermotekwindows.com.au



GreenSmart PROFESSIONAL

UPVC Windows ALLIANCE AN INITIATIVE OF VINYL COUNCIL OF AUSTRALIA

819 Nepean Highway BENTLEIGH Showroom
38-40 Rushwood Drive CRAIGIEBURN Manufacturing